

CANOPY LIGHT | 156 lm/W FORD SERIES - R



25W–65W

IP65 | DLC Premium/DLC 5.0 Ready

CONSTRUCTION

Unique round design made of die-cast aluminum heatsink with built-in sensor, features slim and low profile.

FINISH

Five-step, super durable TGIC paint material resists all tough weather conditions while providing optimal color maintenance.

OPTICS

Fresnel lens with bat-wing shape light distribution pattern for uniform lux output.

INSTALLATION

Universal installation options such as pole-mount, surface-mounted J-BOX with 3/4 inch conduit or side-wiring.



Order Combo										
Series	Power	Color temperature	Beam Angle	DIM	Voltage	CRI	Finish	Mounting	Sensor	Accessory
FORD SERIES - R	25W	4000K	160° Bat-wing	0-10V	120-277V	80+	WHITE	Surface-mount	MIC ①	EM ②
CANOPY LIGHT	40W	5000K		DIM to OFF			BRONZE (MOQ)	Pole-mount		RM ③
	60W	Surface-mount with conduit								
	65W									

Lumen Table

Model No.	Power	Beam Angle	4000K Ra80		5000K Ra80	
			Lumens	LPW	Lumens	LPW
WL-FRD-25R	25	160° Bat-wing	3120	125	3250	130
WL-FRD-40R	40	160° Bat-wing	5184	130	5400	135
WL-FRD-60R	60	160° Bat-wing	7776	130	8100	135
WL-FRD-65R	65	160° Bat-wing	9734	150	10140	156

Above test results are based on initial stage and with AC277V input.


Remarks

- ① MIC: Microwave sensor with bi-level dimming and daylight harvesting function, MAX 8M
- ② EM: 10W 90mins output external emergency kit, surface-mount with waterproof conduit
- ③ RM: Remote controller for re-setting of MIC sensor working pattern.

ACCESSORIES



10W Emergency Kit

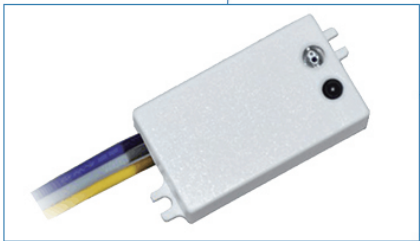


Bi-level microwave sensor



Remote controller for sensor


DIMENSIONS

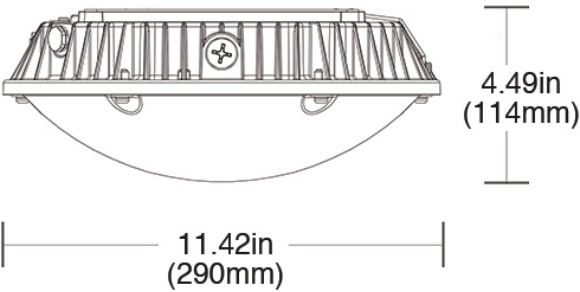


INSTALLATION



Surface-mount




Pole-mount



Surface-mount with conduit

PHOTOMETRIC



160°